



600X600MM
GLOSSY SERIES

AGARIA WHITE MARBLE



600 X 600 MM | PGVT

POLISHED



ANTIQUE SATVARIO



600 X 600 MM | PGVT

POLISHED



AURORA CREMA



600 X 600 MM | PGVT

POLISHED



BEIGE BELLOW



600 X 600 MM | PGVT

POLISHED



BEIGE OBLIQUE



600 X 600 MM | PGVT

POLISHED



BOTTOCHINO CLASSIC



600 X 600 MM | PGVT

POLISHED




BRAZILIA BROWN



600 X 600 MM | PGVT

POLISHED

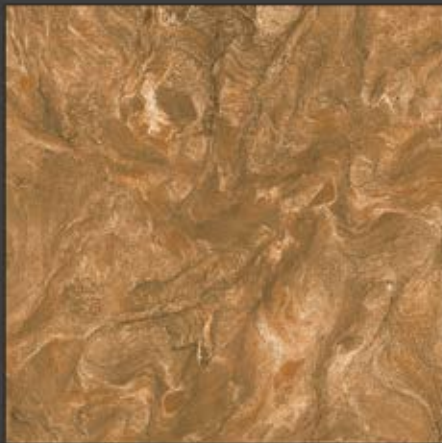

BRAZILIA GOLD



600 X 600 MM | PGVT

POLISHED



CALIPSO BLACK



600 X 600 MM | PGVT

POLISHED



CLASSIC BEIGE



600 X 600 MM | PGVT

POLISHED



CREMA MARFIL



600 X 600 MM | PGVT

POLISHED



CREMA PRESTIGE



600 X 600 MM | PGVT

POLISHED



CRESTA BLACK



600 X 600 MM | PGVT

POLISHED



DAHINO_BR



600 X 600 MM | PGVT

POLISHED



DIANA PEARL



600 X 600 MM | PGVT

POLISHED



DIANO CREMA



600 X 600 MM | PGVT

POLISHED



EMPERADOR LIGHT



600 X 600 MM | PGVT

POLISHED



EMPERADOR STEEL



600 X 600 MM | PGVT

POLISHED





FANTASY GREY



600 X 600 MM | PGVT

POLISHED

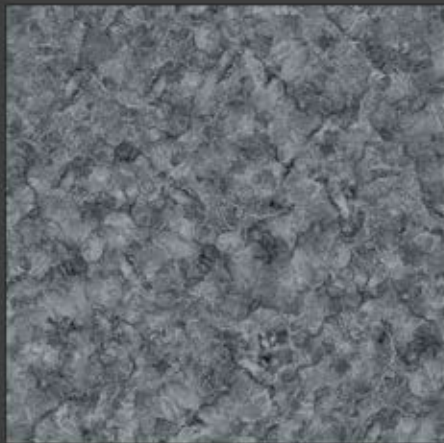

FANTASY WHITE



600 X 600 MM | PGVT

POLISHED



GEMSTONE HONEY



600 X 600 MM | PGVT

POLISHED



GRAFITE BIANCO



600 X 600 MM | PGVT

POLISHED



GRAY FLURRY



600 X 600 MM | PGVT

POLISHED








JASPER BLUE



600 X 600 MM | PGVT

POLISHED

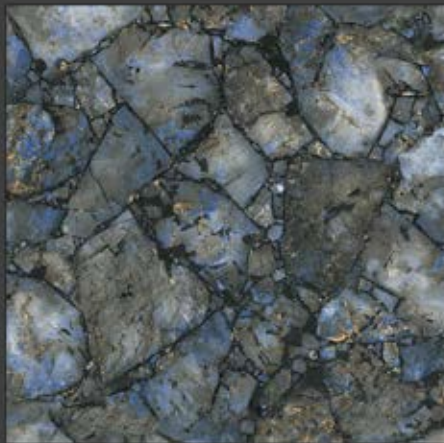

JASPER BROWN



600 X 600 MM | PGVT

POLISHED



MURPHY GREY



600 X 600 MM | PGVT

POLISHED



OMAN BEIGE



600 X 600 MM | PGVT

POLISHED



ONYX AMBER-CREMA



600 X 600 MM | PGVT

POLISHED



ONYX AZURE



600 X 600 MM | PGVT

POLISHED



OPERA BEIGE



600 X 600 MM | PGVT

POLISHED



OYSTER WHITE



600 X 600 MM | PGVT

POLISHED



OYSTER YELLOW



600 X 600 MM | PGVT

POLISHED



RAINBOW ONYX



600 X 600 MM | PGVT

POLISHED



RIVER WAVE BEIGE



600 X 600 MM | PGVT

POLISHED



RIVER WAVE GREY



600 X 600 MM | PGVT

POLISHED



ROSA ALBA



600 X 600 MM | PGVT

POLISHED






SALT & PAPER (S&P GRE)



POLISHED

600 X 600 MM | FULLBODY

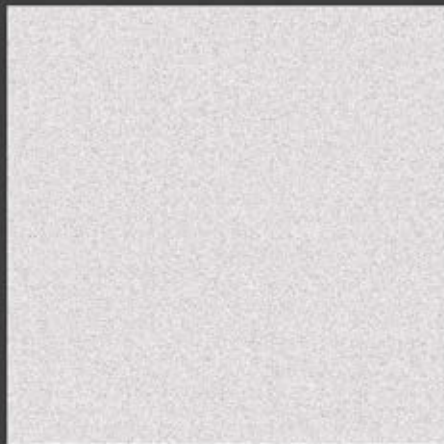

SATUARIO ATTICA



600 X 600 MM | PGVT

POLISHED



SATUARIO GREY



600 X 600 MM | PGVT

POLISHED



SATUARIO SMOKE



600 X 600 MM | PGVT

POLISHED



SATUARIO VENATINO



600 X 600 MM | PGVT

POLISHED



SOLITAIRE BRONZE



600 X 600 MM | PGVT

POLISHED



SOLITAIRE CREME



600 X 600 MM | PGVT

POLISHED



TRAVERTINE GRAY BEIGE



600 X 600 MM | PGVT

POLISHED




TRAVERTINO ELITE



600 X 600 MM | PGVT

POLISHED

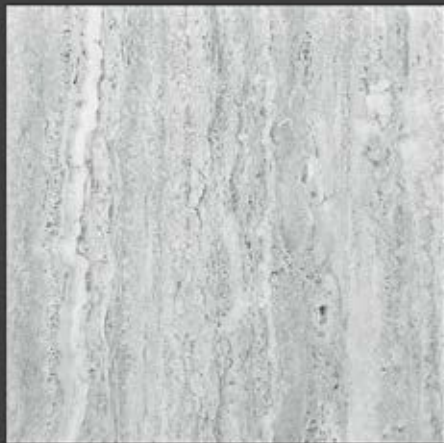

TRAVERTINO NATURAL



600 X 600 MM | PGVT

POLISHED




TUSCAN BROWN



600 X 600 MM | PGVT

POLISHED





TUSCAN CREMA



600 X 600 MM | PGVT

POLISHED



VENEZIA



600 X 600 MM | PGVT

POLISHED



VENICE DARK



600 X 600 MM | PGVT

POLISHED



VENICE LIGHT

600 X 600 MM | PGVT

POLISHED



VOLAKAS



600 X 600 MM | PGVT

POLISHED



ZENITH BEIGE



600 X 600 MM | PGVT

POLISHED



ZENITH BROWN























600 X 600 MM | PGVT

POLISHED



TECHNICAL SPECIFICATION

TEST IDENTIFICATION	TEST METHOD	ISO STANDARD FORM & SIZE	VALUE
 Weight and count	ISO 224-02:1982-2	± 0.0%	± 0.0%
 Thickness	ISO 224-02:1982-2	± 0.0%	± 0.0%
 Moisture of water	ISO 224-02:1982-2	± 0.0%	± 0.0%
 Rectangularity	ISO 224-02:1982-2	± 0.0%	± 0.0%
 Surface texture	ISO 224-02:1982-2	± 0.0%	± 0.0%
 Water absorption	ISO 224-02:1982-2	± 0.0%	± 0.0%
 Flexural strength	ISO 224-02:1982-4	≥ 100MPa	≥ 100MPa
 Modulus of rupture	ISO 224-02:1982-4	≥ 10 GPa**	≥ 10 GPa**
 Resistance to flexure strength	ISO 224-02:1982-4	≥ 1000N**	≥ 1000N**
 Linear thermal expansion	ISO 224-02:1982-4	≥ 14.10 °C	≥ 14.10 °C
 Thermal shock resistance	ISO 224-02:1982-4	No visible defect	No visible defect
 Heat resistance	ISO 224-02:1982-13	Pass grade	Pass grade
 Resistance to chemicals	ISO 224-02:1982-13	No visible effect	No visible effect
 Resistance to acids	ISO 224-02:1982-13	Minimum 40% reduction	Minimum 40% reduction See Class 2
 Colour resistance	ISO 224-02:1982-13	No change	No change
 Colour resistance to UV light	ISO 224-02	No change in color	No change in color
 Dimensional stability (ISO 9000)	ISO 9001	≥ 0.005%	≥ 0.005%
 Surface quality	ISO 224-02:1982-2	See 90%	No visible defect
 Water resistance (ISO 224-02)	ISO 224-02:1982-17	± 0.0	± 0.0
 Absorbed Impurities	-	0%	0%

Note: ** Colour change in this category may vary with the original tile. ** Sight check is one condition in an observed property of surface or surface loss.

Packing details

SIZE	NO. OF TILES	COVERAGE AREA
600 x 600 mm	4 Pcs. per Box	1.44 sq mt. (Approx.)

- A beautiful floor is considered by many as the most vital element of construction. Its what any visitor sees first, and most importantly clear first, is floor is without change.
- It must therefore not only be beautiful but also when it's needs for good to come, but floors are subject to daily grind and exposure of heat light and to stains, oil stains, grease stains, etc. Over the time of time will stain if not maintained. Fortunately the solution is not complexing. Only.

Polished Worked Tiles High Strength Joint free

